


KEY FEATURES:


- ▶ 80 W continuous program power handling
- ▶ 88dB Sensitivity 1w/1m
- ▶ 78Hz ~ 12kHz frequency response range
- ▶ Extended mid range response up to 12kHz
- ▶ 25mm(1 in) copper voice coil
- ▶ Ideal for midrange application

主要特征:

- ▶ 额定功率：40W（IEC标准）
- ▶ 灵敏度为 88dB
- ▶ 频率响应范围：78Hz~12k Hz
- ▶ 频率响应上限达12kHz
- ▶ 25mm 音圈
- ▶ 适用于中音应用

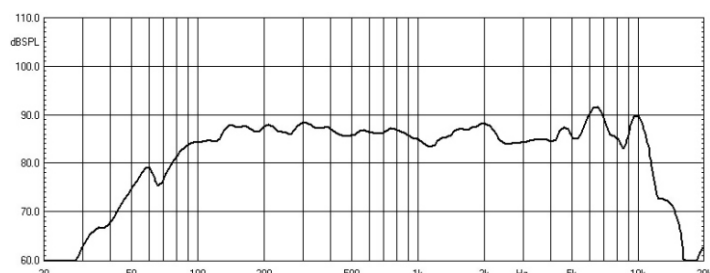

Frequency response curve of the loudspeaker taken in free-field(4pi) environment and mounted in a closed enclosure with an internal volume of 600 Litres enclosing the rear of driver, 1w/1m.

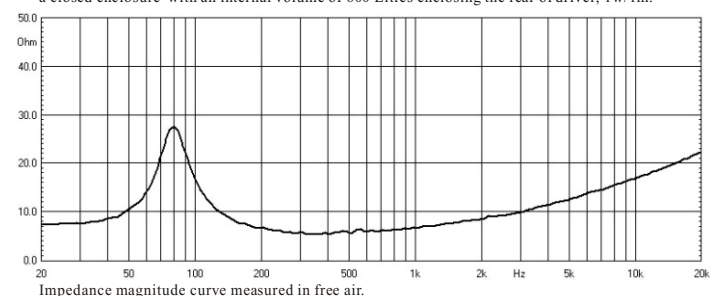

Impedance magnitude curve measured in free air.

SPECIFICATIONS

General Specifications

Nominal Diameter	130/5	mm/inch
Rated Impedance	6	ohm
Nominal Power handling ¹	40	Watts
Program Power ²	80	Watts
Sensitivity(1w/1m) ³	88	dB
Frequency Range ⁴	78- 12k	Hz
Minimum Impedance(Zmin)	5.1	ohm
Voice Coil Diameter	25/1	mm/inch
Voice Coil Material	Copper	
Voice Coil Winding Depth	8	mm
Number of layers	2	
Magnet gap depth	6	mm
Cone Shape	Curved	
Surround Material	Foam	
Basket	Pressed steel	
Magnet Material/Mass	Ceramic/0.28	kg

Thiele - Small Parameters

Resonance frequency	Fs	78.0	Hz
DC resistance	Re	5.0	ohm
Mechanical factor	Qms	2.93	
Electrical factor	Qes	0.65	
Total factor	Qts	0.53	
Mechanical compliance	Cms	0.61	mm/N
Mechanical resistance			
of suspension losses	Rms	1.15	mech-ohm
Effective Moving Mass	Mms	6.85	gr
Half-space efficiency	Eff	0.46	%
BL Factor	BL	5.1	T.m
Equivalent Cas air load	Vas	6.6	liters
Effective piston area	Sd	0.0088	m ²
Max. linear excursion ⁵	Xmax	2.5	mm
Voice - coil inductance	Le1K	0.35	mH

Mounting Information

Overall Diameter	138.5	mm
Bolt Circle Diameter	126.5	mm
Bolt Hole Diameter	4.8	mm
Baffle Cutout Diameter	115	mm
Overall Depth	65	mm
Net Weight	0.8	kg

NOTES:

1. IEC60268-5 standard
2. Program Power is defined as 3 dB greater than the nominal power handling.
3. Sensitivity is measured at 1W input on rated impedance at 1m on axis and averaged between 200Hz and 1000Hz.
4. Frequency range is defined as the band of frequencies delineated by the lower and upper limits where the output level drops by 10dB below the rated sensitivity.
5. The maximum linear excursion is calculated as: $(Hvc-Hg)/2+Hg/4$ where Hvc is the voice coil depth and Hg is the gap depth.