

KEY FEATURES:

- ▶ 40W continuous program power handling
- ▶ 93dB Sensitivity 1w/1m
- ▶ 2kHz~17kHz frequency range
- ▶ Silk diaphragm
- ▶ Optimal for vocal tweeter systems

主要特征:

- ▶ 额定功率：20W（IEC标准）
- ▶ 灵敏度：93dB
- ▶ 频率响应范围：2.0k~17k Hz
- ▶ 丝膜
- ▶ 特别为卡拉OK高音而设计

SPECIFICATIONS


General Specifications

Nominal Diameter	25/1	mm/inch
Rated Impedance	6	ohm
DC Resistance	5	ohm
Power handling(2k~10kHz)		
Nominal ¹	20	Watts
Continuous Program ²	40	Watts
Sensitivity ³	93	dB
Frequency Range ⁴	2k~17k	Hz
Minimum Impedance(Zmin)	5.2	ohm
Voice Coil Diameter	25.4/1	mm/inch
Voice Coil Material	Copper	
Voice Coil Former	Aluminum	
Number of layers	2	
Flux Density	1.5	T
Basket	Plastic	
Main Magnet Material/Mass	Ceramic/0.22	kg


Also available in 4ohm, data upon request

Mounting Information

Overall Diameter	104	mm
Bolt Circle Diameter	88	mm
Bolt Hole Diameter	4.5	mm
Baffle Cutout Diameter	72	mm
Overall Depth	50	mm
Net Weight	0.3	kg

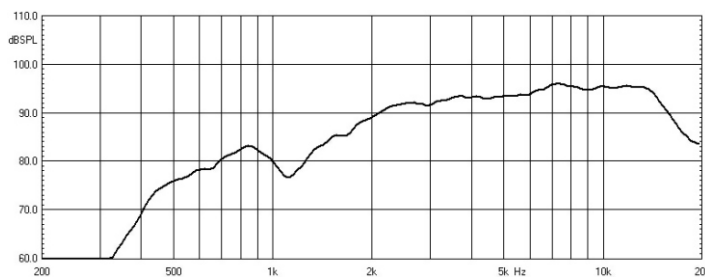

Frequency response curve of the tweeter measured with 1w input on rated impedance at 1m distance on axis

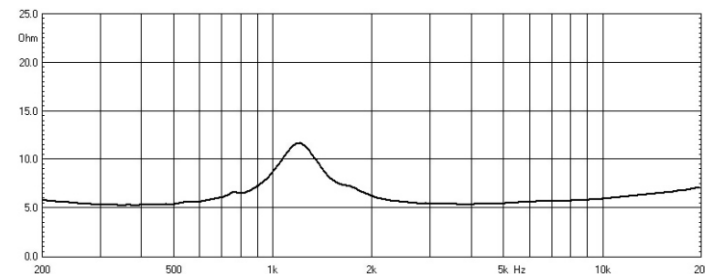

Impedance magnitude curve measured in free air.

NOTES:

1. IEC 60268-5 standard
2. Continuous Program Power is defined as 3dB greater than the AES power.
3. Sensitivity is measured at 1W input on rated impedance at 1m on axis and averaged between 2kHz and 10kHz.
4. Frequency range is defined as the band of frequencies delineated by the lower and upper limits where the output level drops by 10dB below the rated sensitivity.